
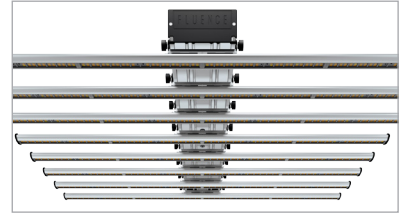





## SPYDRx PLUS

### SPECIFICATIONS

LIGHT SOURCE	LED
SPECTRA	PHYSIOSPEC INDOOR
EFFICACY	2.1 $\mu\text{mol}/\text{J}$
PPF	1410 $\mu\text{mol}/\text{s}$
INPUT POWER	660 WATTS
INPUT VOLTAGE	100-277V
L / H / W   WEIGHT	44 / 42 / 4.6 IN   32 LB
MOUNTING HEIGHT	6 INCHES FROM CANOPY
THERMAL MANAGEMENT	PASSIVE
DIMMING	PWM

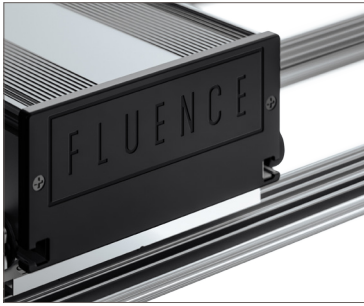

### PHYSIOSPEC INDOOR

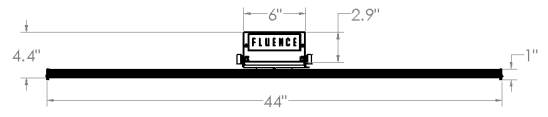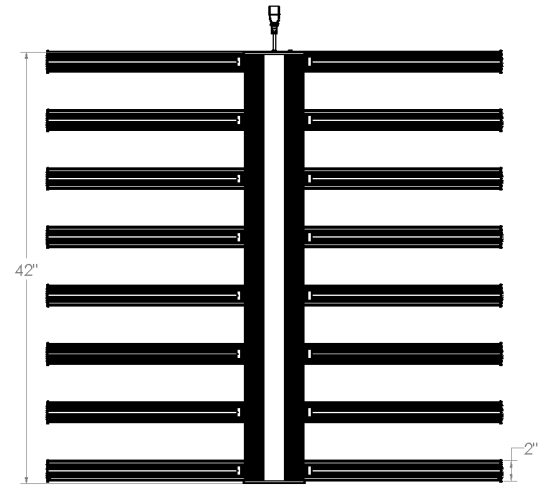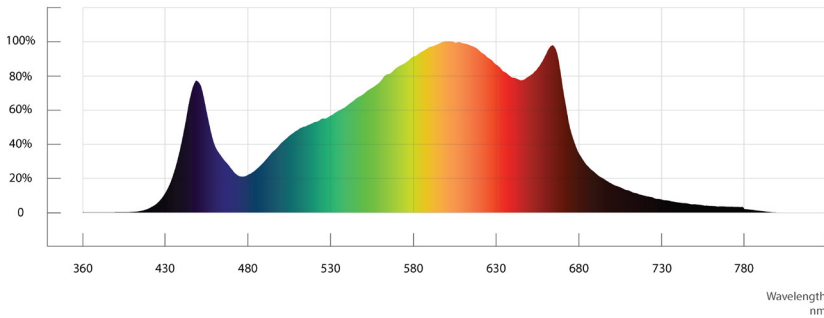

### STOCK KEEPING UNITS

FAMILY	MODEL	SPECTRUM	INPUT VOLTAGE	CORD LENGTH	AC PLUG	MOUNTING
SR SPYDR	X X	1 PHYSIOSPEC INDOOR	1 100-277V	06 6 FEET	N5 NEMA 5-15P	B C-BRACKET
			2 200-277V	15 15 FEET	N6 NEMA 6-15P L7 NEMA L7-15P PT PIGTAILS	G AIRCRAFT CABLE A ADJUSTABLE CABLE

